
WORK TRIPS AND SAFETY OF BICYCLISTS

DINESH MOHAN*

**Co-ordinator, Transportation Research and Injury Prevention Programme, Indian Institute of Technology, Delhi, New Delhi, India*

ABSTRACT

A large number of commuters use bicycles to get to work in India. However, there are no special facilities for them on Indian roads and they are involved in a disproportionate share of road crashes. Though many countries around the world have put in place policies for integrating bicycle traffic on all arterial roads, there is no such move in India yet. The enactment of such policies is necessary as cycling and walking, separately or in conjunction with public transport, offer significant positive health gains and reduction in pollution and accidents. For such policies to be successful Indian professionals have to develop designs of road cross-sections and infrastructure that suit our special needs.

INTRODUCTION

Recently the ministers and representatives of the European Member States of WHO and members of the European Commission released a *Draft Charter On Transport, Environment and Health*.¹ The ministers recognise “that forms of transport that entail physical activity, like cycling and walking, separately or in conjunction with public transport, offer significant positive health gains; however, these transport modes have often been overlooked in planning and decision-making.” They also commit future policies toward “shifting transport to environmentally sound and health-promoting modes.” In India there is no policy document that deals with the problem of transport and its adverse health effects (accidents, pollution, noise, etc.) in an integrated manner. In any case, it would be difficult to move toward such goals unless we have a much better understanding of the factors that are critical in selection of travel mode choice, especially for work trips.

In this paper we present an analysis of the role of accident risk in deterring bicycle use in different nations around the world and the possibilities of correcting the situation in the future.

BICYCLE TRIPS AND SAFETY

The rates of deaths and injury have been reducing over the past two decades in the highly motorised countries (HMCs) but not in the less motorised countries (LMCs). The composition of traffic and accident patterns in modern LMCs are not only different from those prevailing today in the HMCs, but they are also substantially different from those prevailing in the HMCs in the past. The HMCs have never experienced road traffic that

comprises such a high proportion of motorised two-wheelers (MTWs), buses and trucks sharing the same road space with pedestrians and bicyclists. The traffic mix and problems faced by LMCs constitute a new phenomenon not experienced by the HMCs in their process of development. Therefore, it is necessary to examine the issues at a more fundamental level. Simple transfer of knowledge and technologies from HMCs to LMCs may not be entirely feasible or that effective. The experience and knowledge generated in the HMCs would, however, be very useful if the scientific basis of the same is used to develop appropriate solutions for the LMCs like India.

Some studies show that non-motorised traffic takes up a significant share of trips on both urban and rural roads in India. Pedestrians, bicyclists and motorcycle riders (VRUs) constitute the majority and the most important segment of road users in such countries.² The main difference in HMCs and India is that the exposure of vulnerable road users in the former is lower than that in the latter both on urban and rural roads. Traffic cannot be separated at all locations and so road designs of the future will have to give much more importance to these issues.

The issues can be summarised as under:

- Composition of traffic and crashes very different when bicycles are a large proportion of the traffic stream
- In urban areas a majority of road crash victims can be vulnerable road users
- Buses and trucks also involved in crashes
- Exposure of vulnerable road users not likely to reduce substantially
- Expressway use is likely to be limited in India for the near future
- High proportion of motorcycles in most cities of India
- No precedence in highly motorised countries
- Traffic in India more complex than that in HMCs

Data from LMCs like China and India indicate that use of bicycles for work trips in some cities is reducing with an increase in per capita incomes. But, in some urban areas of Europe there has been an increase in bicycle use in the past two decades among adults. However, in all these countries cyclists are involved in a disproportionate proportion of fatal crashes (Figures 1 and 2). For example, in Delhi (India) cyclists constitute 5% of the trips but 14% of the fatalities.³ In Copenhagen (Denmark) bicyclists had a fatality rate of 21 per million trips compared to 6 for car and 0.5 for bus occupants.⁴ This may account for the declining rate of school trips by bicycle in many countries of Europe. Daily cycling trips among adults in six European countries range from about 1 in Holland to as low as 0.1 in the UK. Short trips (trips under 5km) in these countries are still done by car 30 to 65% of the time, and these are the countries with most cycling and walking in Europe. In spite of low bicycle usage in Europe, bicyclists account for 5-6% of deaths and 78% of injuries.⁵ Cyclists account for more fatal accidents than pedestrians in some countries, such as the Netherlands where cycling is common

Figure 1: Proportion of trips and fatalities for road users in Delhi, India


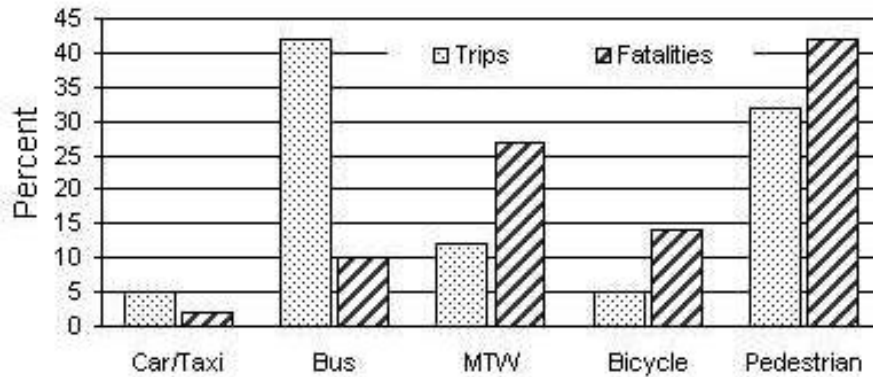


Figure 2: Trip types and fatality rates in central Copenhagen, Denmark

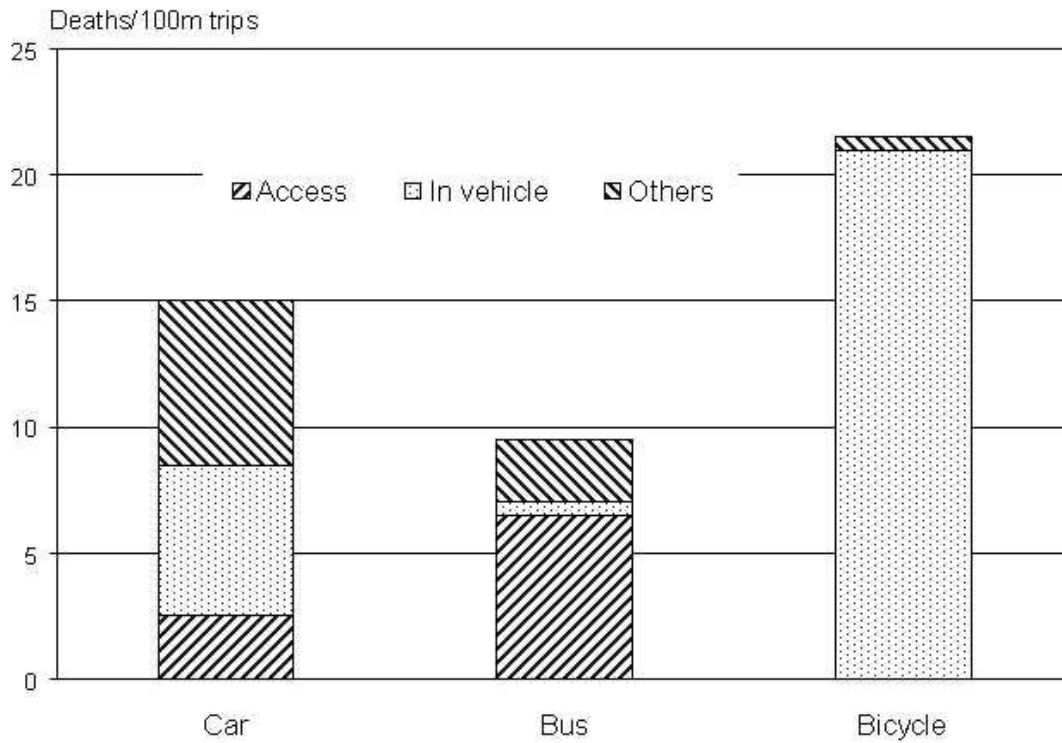


The percentage of pedestrian and bicycle fatalities as a proportion of all road traffic crash fatalities in some HMCs and LMCs is given in Table 1. These data show that the percentage of fatalities is usually higher in LMCs than that in HMCs. These differences exist largely because of the higher exposure rates of pedestrians and bicyclists in LMCs. Mixed land use is very common in LMCs and so these trips can constitute a high proportion of the total trips. Buses and trucks constitute a higher proportion of all vehicles on the road in LMCs than in HMCs. This increases the probability of conflict with these heavy vehicles. The injuries sustained in impacts with heavy vehicles are also likely to be more severe than

those in crashes with cars. In most of the LMCs, the VRUs constitute 60-80 percent of all casualties. This flows logically from the fact that this class of road users forms the majority of those using the road. In a city like Delhi (India) a very large proportion of the bicycle trips are for commuting to work, where as in HICs this constitutes a much smaller proportion (Figure 3). Exact figures for bicycle trips by purpose are not available for Indian cities but the overall figures for trips by all modes show that in most cities work trips constitute 40% -50% of trips, school trips 30%-40% and only a small proportion for social and other purposes.⁶ Bicycle trips are likely to have similar distributions in Indian cities.

Table 1. Pedestrian and Bicycle fatalities in LMCs and HMCs


Country	Percent pedestrian fatalities	Percent bicycle fatalities
Delhi, India (1994)	42	14
Thailand (1987)	47	6
Bandung, Indonesia (1990)	33	7
Colombo, Sri Lanka (1991)	38	8
China (1994)	27	23
Australia (1990)	18	4
U.S.A. (1995)	13	2

Figure 3: Purpose of bicycle trips in The Netherlands, Germany and USA (Ref. 4)

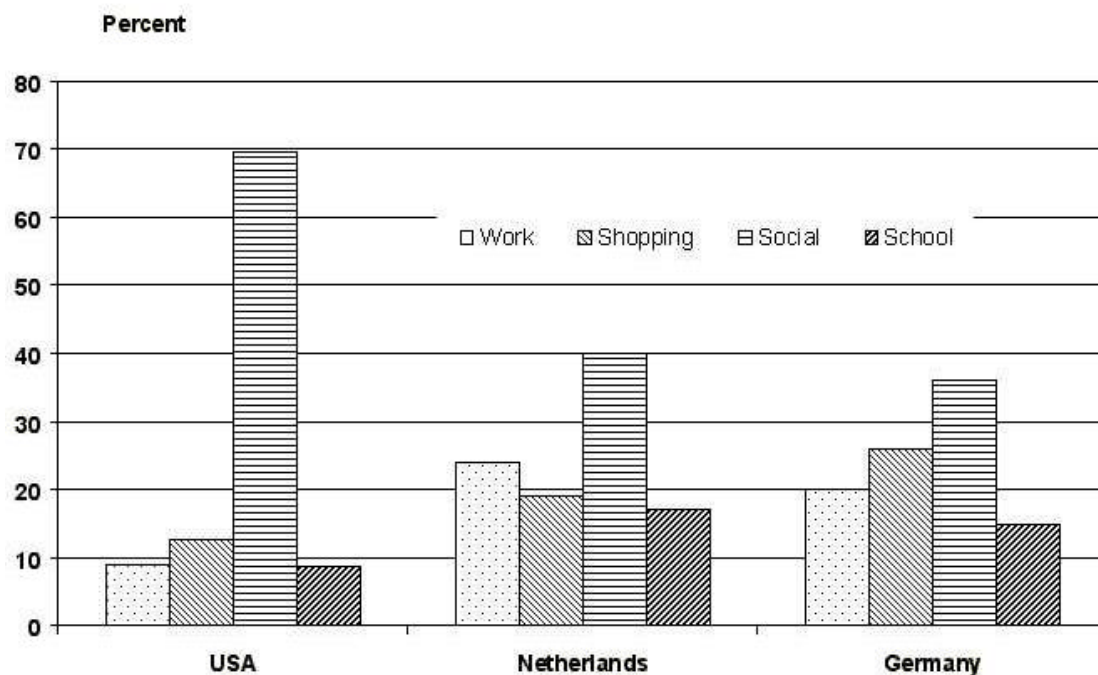

Because VRUs are not protected by metallic or energy absorbing materials, they sustain relatively serious injuries even at low velocity crashes. A study shows that in India buses and trucks are involved in a greater proportion of crashes than they are in HMCs (Figure 4).⁷ This pattern is very different from that obtained in the highly motorised nations where buses and trucks are not involved in such a high proportion of fatalities. Since most of those killed in impacts with buses and trucks are VRUs, we must give that much more attention to designing safer front structures for these vehicles. However, in the past four decades a disproportionately high share of research funds, time and energy have been spent on making the car occupant safer and more comfortable.

Figure 4: Proportion of vehicles involved in crashes in different locations in India

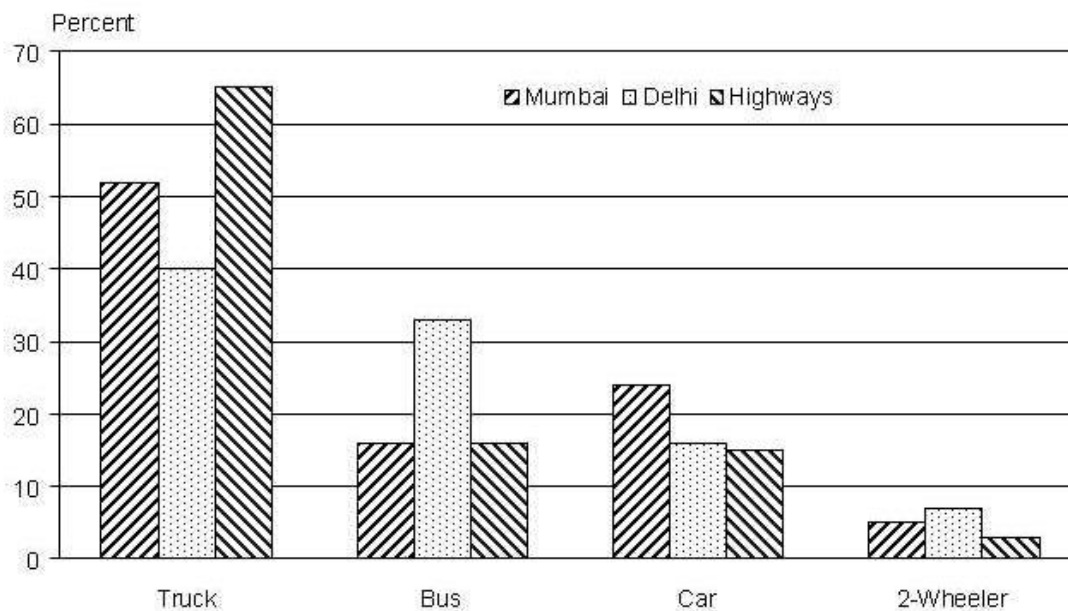

VEHICLE DESIGN

Most of the studies done on pedestrian and bicycle impacts in the last twenty years have concentrated on impacts with cars. These studies are aimed at developing car fronts that are less aggressive. In such impacts the front of the car generally impacts the lower limbs and the torso and head impacts the bonnet (hood), cowl area, and the windshield of the car. These kinematics are very different from that which would be experienced in bus and truck impacts with pedestrians as these vehicles present a vertical structure for the whole body, whether adult or child. A study of pedestrian impacts with light vehicles and heavy vehicles, reports that "pedestrians struck by the fronts of buses or heavy goods vehicles sustained fewer serious pelvic and leg injuries and more serious chest, arm and head injuries than pedestrians struck by the fronts of cars."⁸ Therefore it is very important that fronts of buses and trucks be designed which are much more forgiving in impacts with pedestrians. Some work in this area has been started as reported by Kajzer, Yang and Mohan¹ and Chawla et al.⁹ However, this work needs to be taken up formally in India so that the relevant standards can be established. The bodies of trucks and buses are not fabricated by the vehicle manufacturers in India but by local body builders. Once standards for safer fronts are mandated it would be necessary that the front of the bus/truck be an integral part of the chassis produced by the manufacturer.

SPEED CONTROL

The safety of road users is influenced both by the absolute speed of vehicles and by the variation in speeds among vehicles on the road.¹⁰ There is enough evidence to show that lowering of speed limits on expressways and urban roads result in fewer fatalities and injuries.¹¹ The data presented show that the increase in speed limits from 55 mph to 65 mph on interstate highways in the USA resulted in 2-4 mph increase in mean speeds and 19%-34% increase in fatalities. Reduction of speed limits by 10-20 km/h on motorways and rural roads in Switzerland and Sweden resulted in 6%-21% fewer fatalities. A study on effects of speed limits on casualties in 21 countries concluded that reducing speed limits from 60 to 50 km/h would result in a reduction of 25% in fatalities and casualties.¹² A reduction in the speed limit from 60 to 50 km/h in Zurich has been reported to have resulted in 24% fewer pedestrian fatalities. For car occupants in crashes at 80 km/h the likelihood of death is 20 times more than at 32 km/h.¹³ The estimates for probability of pedestrian deaths at different impact velocities are: 5%-8% at 30 km/h, 25% at 40 km/h, 45%-80% at 50 km/h, and more than 85% at 60 km/h.

Speed limits are difficult to enforce if the design speed of a road is much higher than the speed limit and the road has low density of traffic. Enforcement on rural roads is also very difficult. Fleet owners can be forced to have trip times so regulated that the drivers do not have to exceed speed limits on inter-city trips. In many countries buses and trucks are fitted with speed limiting devices and speed recording systems. This can be implemented right away on all buses and trucks in India. Urban buses in particular could have speed limiters fixed at 50 km/h. We recommend a speed limit of 50 km/h for urban areas because the fatal crashes take place when buses are travelling at high speeds during lean periods. The speed limiters would ensure that buses do not speed when traffic is not heavy. Trucks and buses using inter-city highways could have speed limiters fixed at 90 km/h. A similar measure could eventually be introduced on cars, motorcycles and taxis also. In urban areas the most effective way of speed regulation is by *traffic calming measures* which are described briefly below.

ROAD DESIGN

The most important aspect of road design is that slow traffic on arterial roads and highways be segregated from fast moving traffic. Experiences from China, Netherlands and reports from India¹⁴ show that such schemes are possible to implement and effective. It is important that rural roads be designed in such a manner that the design speed is kept below 100 km/h. Use of roundabouts at intersections and visual cues that do not give the driver a feeling of great expanses helps in controlling speeds. These include advisory speed limit signs, reflecting surfaces on the side of the road (painted trees, reflectors mounted on posts, etc.). When rural roads pass through built up areas, physical measures are necessary to slow down the vehicles. These include constructing very conspicuous "gates" at the entrance of the village/town, use of speed breakers and even putting barriers to make the road less negotiable at high speeds.

In urban areas the presence of intersections and high density of traffic on the roads control speeds. Roundabouts are very effective in controlling speeds on arterial roads in urban areas and some modern designs are also very effective in channelising traffic. One great advantage of roundabouts over traffic lights is that they are very effective in the absence of police officers and at night time.

In residential and shopping areas maximum speeds of vehicles have to be kept below 30 km/h and this can only be done through traffic calming methods. These involve: narrowing of streets, giving priority to pedestrians and bicyclists, link closure, partial street closure, use of speed breakers (road humps), raised pedestrian crossings, roundabouts, channelization, rumble devices, chicanes ('build outs' or 'kerb extensions'), pinch points, etc. With well designed traffic calming measures road fatalities can be brought almost to zero levels in residential areas.¹⁵

REFERENCES

-
- ¹ Report on Third Ministerial Conference On Environment and Health London (1999), EUR/ICP/EHCO 02 02 05/19, WHO Regional Office for Europe, Copenhagen, Denmark.
- ² Mohan, D. and Tiwari, G. (1998) Traffic safety in low-income countries: Issues and concerns regarding technology transfer from high-income countries." In: Reflections on the transfer of traffic safety knowledge to motorising nations. Vermont South, Australia: Global Traffic Safety Trust.
- ³ Mohan, D. and Tiwari, G. (1999) Sustainable Transport Systems: Linkages Between Environmental Issues, Public Transport, Non-motorised Transport and Safety, Economic and Political Weekly, 34:25, 1589-1596.
- ⁴ Jorgensen, N. O. (1996). The risk of injury and accident by different travel modes. Proceedings of the International Conference on Passenger Safety in European Public Transport. Brussels: European Transport Safety Council. 17-25.
- ⁵ Pucher, J. and Dijkstra, L. (2000) Making Walking and Cycling Safer: Lessons from Europe, Transportation Quarterly, Vol. 54, No. 3.
- ⁶ Report of the Task Force on Urban Transport Sector (2001). Ministry of Urban Development and Poverty Alleviation, New Delhi.
- ⁷ Kajzer, J., Yang, YK and Mohan D. (1992). Safer Bus Fronts for Pedestrian Impact Protection in Bus-Pedestrian Accidents. Proceedings 1992 International IRCOBI Conference on the Biomechanics of Impacts, IRCOBI, Bron, France, 13-23.
- ⁸ Ashton, S.J., Bimson, S., and Driswill, C. (1979). Patterns of Injuries in Pedestrian Accidents. Proc. Twenty-Third Conference of the American Association for Automotive Medicine, AAAM, Des Plaines, IL, USA, 185-195.
- ⁹ Chawla, A., Mohan, D. Sharma, V. and Kajzer, J. "Safer Truck Front Design for Pedestrian Impacts", Journal Crash Prevention and Injury Control, (*in print*)
- ¹⁰ Noguchi, K. (1990). In search of "optimum" speed: from the user's viewpoint. IAATS Research, 14:66-75.

¹¹ ETSC (1995). Reducing traffic injuries resulting from excess and inappropriate speed. European Transport Safety Council, Brussels.

¹² Fieldwick, R. and Brown, R.J. (1987). The effect of speed limits on road casualties. *Traffic Engineering and Control*, 28:635-640.

¹³ IIHS (1987). IIHS Facts: 55 speed limit. Insurance Institute for Highway Safety, Arlington VA, USA.

¹⁴ Tiwari, G. (1999). Road Designs for Improving Traffic Flow: A Bicycle Master Plan for Delhi. TRIPP, Indian Institute of Technology, Delhi.

¹⁵ Kjemtrup, K. and Herrstedt, L. (1992). Speed Management and Traffic Calming in Urban Areas in Europe: A Historical View. *Accident Analysis and Prevention*, 24(1):57-68.